



Greenply

DOORS

THE HOME  
GUARDIAN

ENDURING TRUST & PEACE OF MIND



*Supreme designs & styles*



*Excellent strength & durability*



*Lifetime warranty*

# ABOUT US



## TRANSFORMING INTERIOR FOR ABOUT **3 DECADES**

**Greenply Industries** is among India's largest interior infrastructure companies transforming Indian interiors spaces for more than three decades with comprehensive range of plywood & blockboards, MDF, decorative veneers, doors, and other allied products.



### ENDURING TRUST AND PEACE OF MIND

Greenply doors is a perfect blend of durability and tranquility. They provide a haven of security and serenity. Our range zero emission, waterproof and weatherproof doors are not just a part of interior space, they're a commitment to comfort and peace of mind.

## WHY GREENPLY DOORS ?

#### TRUST OF GREENPLY



With a rich Legacy in India's infrastructure sector, Greenply offers a wide range of products to cater consumer needs. Our manufacturing capabilities also include an extensive range of flush doors that can be customised to suit your requirements.

#### PINEWOOD FRAME AND FILLER

100% Pine  
Frame

Strength in every fibre! Our flush doors feature a sturdy pinewood frame and filler, combining beauty with durability for lasting elegance.



#### ZERO EMISSION DOORS

Zero Formaldehyde emission range of doors for your healthy interiors.



#### PLC SEASONED TIMBER

Crafted from carefully seasoned PLC timber making doors more durable and reliable.



#### BEST IN CLASS WARRANTY

Industry- leading warranty for your peace of mind.

## OUR RANGE





# Greenply DOORS CLUB

## FORTIFYING LIVING SPACES

Discover the epitome of luxury and performance with Greenply Club Doors. Greenply Club Doors are designed for those who demand the finest in craftsmanship, style, and performance. Club Doors boast a 100% Pine Wood Frame & Filler, adding warmth and character to your interiors.

### FEATURES :



Zero formaldehyde emission for healthy interiors



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Ensuring a harmonious blend of strength and aesthetics



Unaffected by dust, variation in temperature i.e. extreme heat or cold and heavy rains



Lifetime warranty on manufacturing defects.



Double core with Excellent strength, durability and stability

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**



# Greenply DOORS PLATINUM

## DOORS THAT STAND THE TEST OF TIME

Greenply Platinum Doors stand as a testament to our commitment to excellence. With a remarkable 30-year warranty, they're a commitment to comfort and peace of mind.


### FEATURES :



Zero formaldehyde emission for healthy interiors



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Ensuring a harmonious blend of strength and aesthetics



Unaffected by dust, variation in temperature i.e. extreme heat or cold and heavy rains




Lifetime warranty on manufacturing defects.



Double core with Excellent strength, durability and stability

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**





**Greenply**  
**DOORS**  
**GOLD**

**BOILING WATERPROOF DOORS**

No need to worry about the changing seasons. Greenply Gold Doors provide all weather protection. Each door passes through stringent BWP standards and meticulously crafted making them warp free, ensuring your doors maintain their integrity and functionality over time.

**FEATURES :**



BWP Grade Resole Resin for an efficient waterproofing property



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Keeps formaldehyde emission in check maintaining clean indoor air quality



All weather protection



25 years warranty on manufacturing defects.



Double core with Excellent strength, durability and stability

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**



**Greenply**  
**DOORS**

**BOILING WATERPROOF DOORS**

Prioritizing your well-being, these doors come with an assurance of Zero Formaldehyde emissions. Breathe Easy in a healthier, safer environment. Experience the confidence of quality and the peace of mind of a 25 year warranty with Greenply Doors.

**FEATURES :**



BWP Grade Resole Resin for an efficient waterproofing property



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Keeps formaldehyde emission in check maintaining clean indoor air quality



All weather protection



Ensuring a harmonious blend of strength and aesthetics



Double Core with Excellent strength, durability and stability



25 years warranty on manufacturing defects.

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**



# Greenply DOORS CARVIAH

## BUILT FOR PERFECTION

The doors that come with attractive finishes matching different interior styles. They have smooth surfaces and textured finishes, which doesn't require any paint or polish. These Ready-to-use doors are available in standard sizes to fit most door frames.

### FEATURES:



Wide range of Designs, Colors and Sizes



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Ready to use, no Paint or Polish required



Boiling Waterproof



Zero Maintenance



HD Graphic Doors for Interior Usage

**10 YEARS WARRANTY** 10 years warranty on manufacturing defects.

**USAGE:** INTERNAL & EXTERNAL

**IS:2202**

Available Thickness



Greenply  
DOORS  
DECORATIVE

CRAFTED FOR EXCELLENCE

Fortify your spaces with doors known for their high impact resistance with zero chance of warping. Made to look elegant by decorative veneers and superb finished facing, the exclusive range of Green Doors is known to create an everlasting impression.

FEATURES :



BWP Grade Resole Resin for an efficient waterproofing property



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Wide range of Designs, Colors and Sizes



Warp Free





Higher Screw & Nail Bearing Strength



Uniform Thickness

USAGE: INTERNAL  
IS:2202

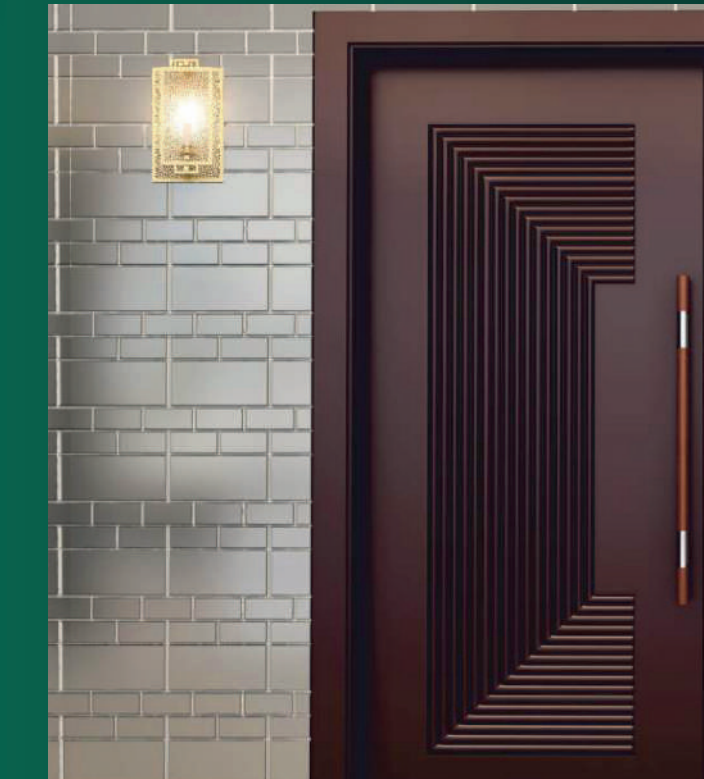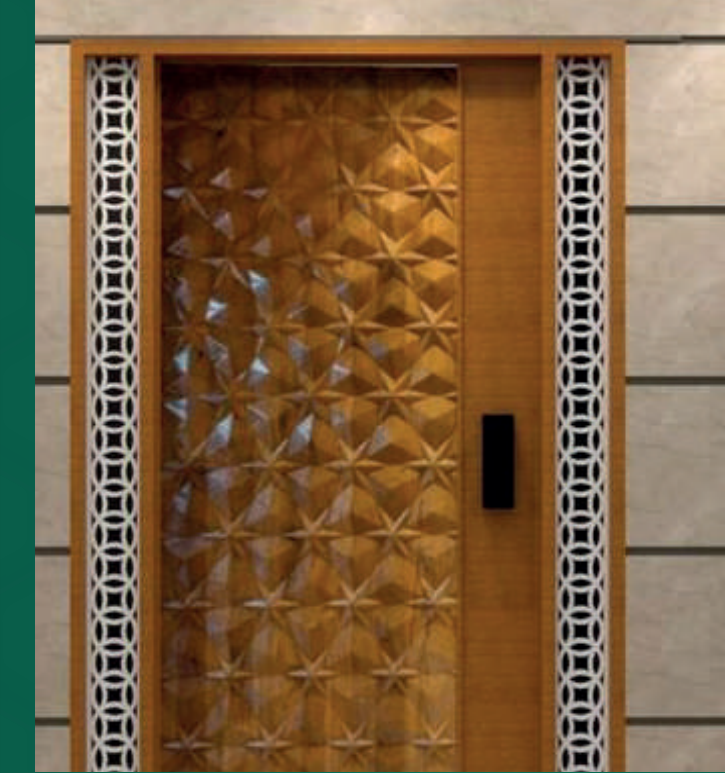

## OPTIMA<sup>G</sup> DOORS

By *Greenply*


### AN ENTRANCE MARKED BY ASSURANCE

Choose Optima G doors and experience a perfect blend of elegance and durability. From scorching heat to heavy rains, Optima G doors are resistant to defend against these conditions. These doors offer uninterrupted assurance of quality and performance.

#### FEATURES :



Keeps formaldehyde emission in check maintaining clean indoor air quality



Ensuring a harmonious blend of strength and aesthetics

**21 YEARS WARRANTY**


21 years warranty on manufacturing defects.



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



All weather protection



Double core with Excellent strength, durability and stability

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**



## ECOTEC<sup>®</sup> DOORS PLATINUM

From *Greenply*


### WEATHER PROOF DOORS WITH UNMATCHED WARRANTY

Ecotech Platinum Doors discover the perfect blend of affordability and quality with Ecotech Platinum Doors. Featuring a double core, they deliver enduring strength, durability and a 15 year warranty for your satisfaction.

#### FEATURES :



Ensuring a harmonious blend of strength and aesthetics



Double Core with Excellent strength, durability and stability

**15 YEARS WARRANTY**

15 years warranty on manufacturing defects.



Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.



Weather and boil proof

**USAGE:** INTERNAL & EXTERNAL  
**IS:2202**





## OPEN UP A WORLD OF POSSIBILITIES

While their build ensures great quality, their dimensional stability & weather-resistant properties guarantee the best security for homes and offices. Ecotec doors are made to withstand high impact and come with minimal chances of warping and undulations.

### FEATURES :

- 100 % Seasoned and Treated Wood
- Warp Free
- Dimensionally Stable
- 5 years warranty on manufacturing defects.
- Borer Fungus proof & Anti Termite Guarantee for long lasting furniture.
- Weather Protection
- Higher Screw & Nail Bearing Strength

**USAGE:** INTERNAL & EXTERNAL

**IS:2202**



## BRAND WISE SPECIFICATION with FEATURES

Brand	Features & Benefit						
	Resin	Timber 'Frame'	Timber 'Filler'	Core	Process	Preservative Treatment	Warranty
Greenply Club Door	E-0 grade PF Resole BIS-848	100% Pine	100% Pine	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	Life Time
Greenply Platinum Door (New Addition)	E-0 grade PF Resole BIS-848	100% Pine	100% Pine	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	30 Years
Greenply Gold Door	PF BIS 848 Un-extended	100% Pine	Selected HW	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	25 Years
Greenply Door	PF BIS 848 Un-extended	100% Pine	Selected HW	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	25 Years
Optima G Door	PF BIS 848 Un-extended	100% Pine	Selected HW	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	21 Years
Ecotec Platinum	PF BIS-848	100% Pine	Selected HW	Double	Mat, Double Press	Borer Proof & Anti Termite Warranty	15 Years
Ecotec (Exclusively for Project)	PF	HW	HW	Single	-	Borer Proof & Termite Resistance	5 Years

## FIXING & SETUP GUIDELINE



### INSTALLATION GUIDELINES

- Doors can be cut on all the sides up to 12mm per side. Trimming should be done on both sides equally.
- Subsequent to trimming all sides should be primed or sealed with wood sealant and must be applied immediately.
- Bottom of the door must be painted/polished before installation of the door is done.
- Hinges must be aligned before fitting the door, to avoid bending. It is recommended that you fix two hinges in the upper portion on the door with a gap of 6 inches from each other and by leaving a gap of 12 inches from the top, for the first hinges.
- We will not be held liable for any of the damages due to the wind or any external forces.
- If the doors are trimmed more than 12mm in width or height from any side, the manufacturing warranty shall be void and Greenply shall not be responsible for the same.
- Bathroom doors must be fitted with teak or hardwood lipping at the bottom to prevent moisture absorption.
- 3mm space between the frame and door must be provided on all sides of the door shutter.



### STORAGE GUIDELINES

Store flat on a level surface in a clean, dry, well ventilated building. Protect from dirt, water and abuse. Allow air circulation.

Doors should not be subjected to abnormal or sudden variations in heat, dryness or humidity and should not be exposed to direct sunlight. Recommended humidity and temperature are 25% – 55% RH and 50°F – 90°F (10°C – 32°C).



### WARNING

Distortion, warping, bowing and waviness, can appear as a result of incorrect topcoat (paints or stains), improper finishing techniques. These are caused by incorrect topcoat, watered down paints, high humidity environments, excessive application of paints, and doors not being acclimated properly.


Please read and understand the entire procedure before attempting to finish your doors. Be sure to follow the coating manufacturer's warnings and instructions on all product labels. Greenply does not warrant any coating unless applied by Greenply. Any damage caused by or resulting from the application of a stain or paint will void the door warranty.

Greenply gives warranty only for its product. If it is found that there is a manufacturing defect, Greenply shall repair only for its product and will not be responsible for any value addition what so ever.



## TECHNICAL SPECIFICATIONS

SL	SPECIFICATION	GREEN DOORS
1	IS code	2202 (part 1)
2	Face Veneer	0.5mm - Okume
3	Style & rail	Pine wood (55-65 mm)
4	Core	Composed cores 1.75mm * 2 (double core)
5	Resin	Resole Phenolic Resin (IS:848)
6	Timber Seasoning	PLC Seasoned
7	Filler	Selected HW
8	Lock Section	Both side 65*150mm
9	Density	Mass density around 520-500kg/M3
10	Guarantee Period	25 yrs
11	Grade	BWP Grade
12	Preservative	By-Flex TC (Organic Compound)
13	Protection	Boror free, Termite resistant
14	Shutter type	Non decorative
15	E-1 certification	Yes
16	FSC certification	Yes
17	CE certification	Yes

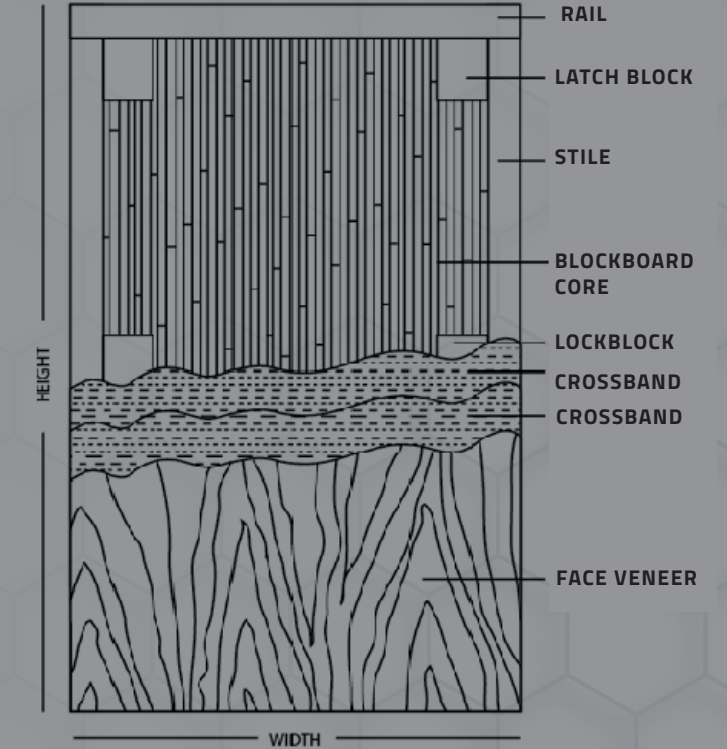

### FRAMES

- All frames are made from imported pine.
- PLC seasoned imported pine.

### FILLER

- Pine filler
- Selected hardwood

### CORE

- Selected treated hardwood double core
- Thickness - 1.75mm \* 2

### FACE

- A grade Okoume face
- Thickness - 0.5mm

**CERTIFICATIONS :** IS:2202 (Part 1)

Conforms to CE

IGBC (Indian green building council)



Greenply Industries Limited

**Corporate Address-:**

Madgul Lounge, 5th & 6th Floor, 23 Chetla Central  
Road, Chetla, Kolkata - 700027

West Bengal, India

Website: [www.greenply.com](http://www.greenply.com)

Email: [marketing.ply@greenply.com](mailto:marketing.ply@greenply.com)

Toll free: 1800-103-4050